


STM series double joint cylinder



Symbol

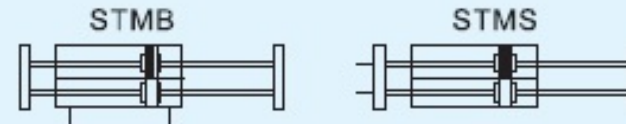

Specification

Inner diameter (mm)	10	16	20	25
Acting mode	Repeated move			
Working medium	Air (Cleaned by 40µm filter)			
Working temperature	-5~70			
Operating pressure range	0.1~0.9MPa(14~128Psi)			
Guaranteed withstand pressure	1.5MPa(213Psi)			
Speed range	50~200			
Buffering mode	No	Oil pressure buffer (optional)		
Lubrication oil	Not need			
Non-rotation accuracy	±0.1°	±0.05°		
Port size	M5×0.8			PT1/8